



Date: 06/09/2009

MAIDA STYLE NUMBER 14FE820K

MAIDA ITEM NUMBER 01-2288

VARISTOR SPEC SHEET

Electrical Specifications

Continuous AC Voltage	50	VAC
Continuous DC Voltage	65	VDC
Maximum DC Leakage @ 65 VDC	200	uA
Low Varistor Voltage Limit	74	VDC
High Varistor Voltage Limit	90	VDC
Nominal Varistor Voltage	82	VDC
Current for Varistor Voltage	1	mA
Maximum Clamp Voltage	135	V
Maximum Clamp Voltage Test Current	50	A
Peak Current Rating (1 Pulse)	4500	A
Peak Current Rating (2 Pulse)	2500	A
Energy Rating (8X20us)	27	J
Energy Rating (10X1000us)	27	J
Typical Capacitance	2400	pF
Impulse Response Time	< 50	ns
Minimum Hipot of Coating	2500	VDC
Minimum I.R. of Coating	1000	MΩ


Physical Specifications

Lead Style	
X Nominal	0.295 in.
X Tolerance	0.039 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
Y Nominal	0.15 in.
Y Tolerance	0.03 in.
d Nominal	0.032 in.
Wire Gauge	20 AWG
Minimum Marking	MDC-FV-14E820K
Nominal Disk Size	14 mm
D Maximum	0.748 in.
T Maximum	0.386 in.
H Maximum	0.827 in.

Thermal Specifications

Minimum Operating Temperature	-55	°C
Maximum Operating Temperature	85	°C
Varistor Voltage Temperature Coeff	-0.05	%/°C
Minimum Storage Temperature	-55	°C
Maximum Storage Temperature	125	°C
Current/Energy Derating Above 85°C	-2.5	%/°C

Notes

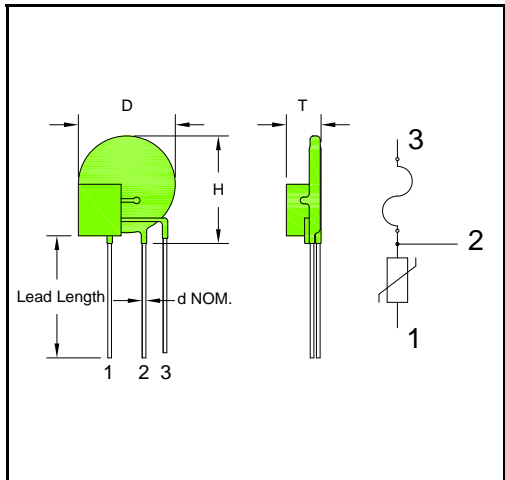

* Contact Maida for a more detailed configuration drawing.

Safety Agency Recognitions

UL 1449 File Number	E321173
UL 1414 File Number	
CSA File Number	
VDE File Number	
SEV File Number	



DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

(757) 723-0785 Fax (757) 722-1194